


VALVE DATA SHEET

FLOW CONTROL COMPANY LTD

ORDER POR00016
ITEM : 11.00 ÷ 11.05

CALOBRI FIG.: **D3F A105-F6HFS**
GLOBE VALVE S.300 O.S & Y BOLTED BONNET
REDUCED BORE FLANGED ENDS

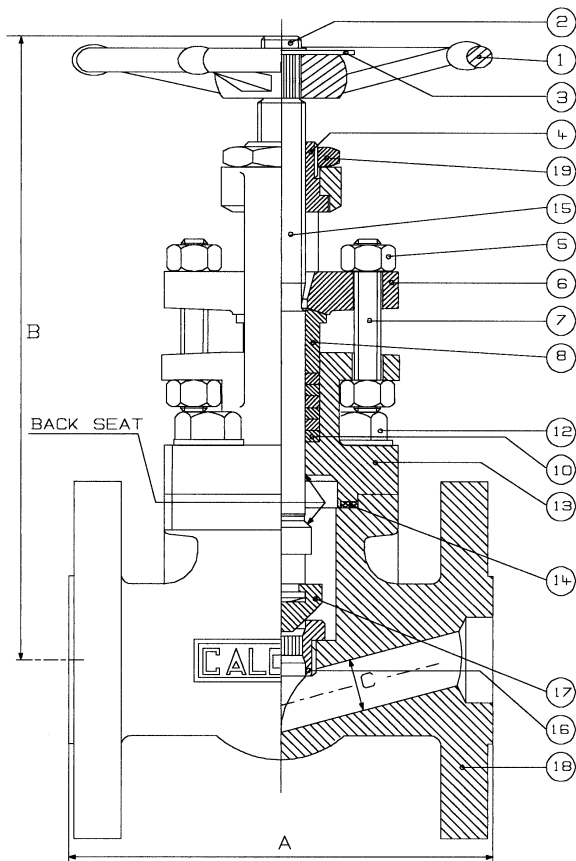

LIST OF COMPONENT / MATERIAL SPECIFICATION		
001	HANDWHEEL	CARBON STEEL
002	WHEELNUT	CARBON STEEL
003	NAMEPLATE	ALLUMINIUM
004	YOKE NUT	ASTM A582 TYPE 416
005	GLAND NUT	ASTM A194 2H
006	GRAND FLANGE	ASTM A105
007	GLAND STUD	AISI 410
008	GLAND	ASTM A276 TYPE 410
009		
010	PACKING	GRAPHITE
011		
012	BOLTS	ASTM A193 B7
013	BONNET	ASTM A105
014	GASKET	316+GRAPHITE SPIRAL WOUND
015	STEM	ASTM A276 TYPE 410
016	SEAT	ASTM A276 TYPE 410+Stellite Gr.'6
017	DISC	ASTM A182 F6
018	BODY	ASTM A105
019	YOKE RETAIN.NUT	ASTM A582 TYPE 416
020		

DIMENSION AND WEIGHT					
REDUCED BORE		A	B	C	Weight Kg.
Dn	Fig.n°	End to end	Centre to open	Bore Diam.	
-	D3F	153	148	9	4.0
15		178	165	13	5.0
20		203	180	17.5	11.0
25		-	-	-	-
32		229	248	29.5	14.0
40		267	257	35	20.5
50		-	-	-	-