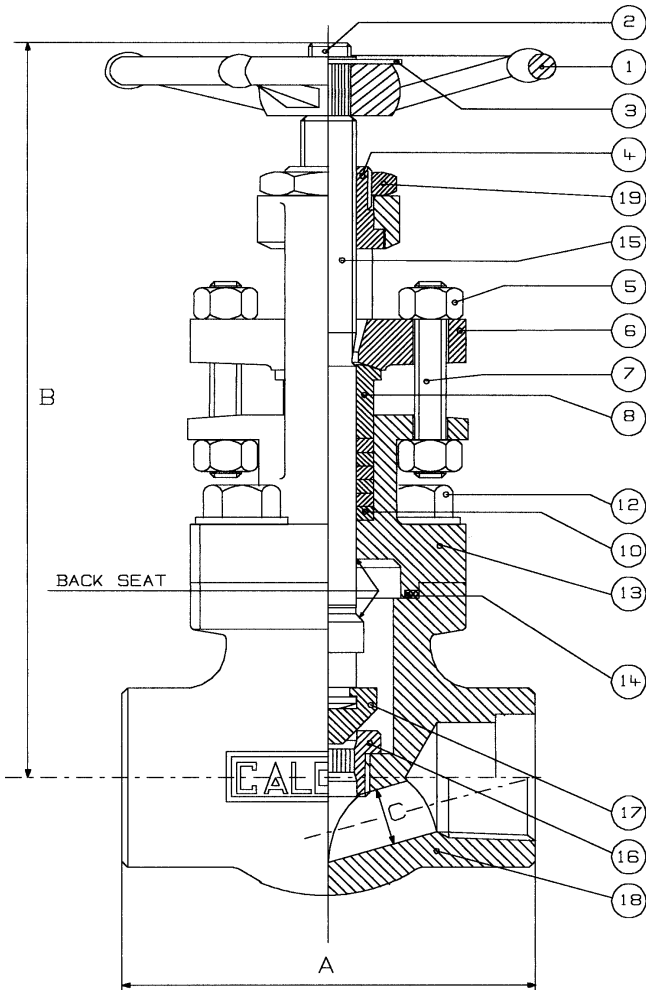


VALVE DATA SHEET

FLOW CONTROL COMPANY LTD

 ORDER POR00016
 ITEM : 3.00 ÷ 3.10


CALOBRI FIG.:	D8 A105-F6-HFS
GLOBE VALVE S.800 O.S & Y SQUARE BOLTED BONNET REDUCED BORE SOCKET WELD OR THREADED NPT	

LIST OF COMPONENT / MATERIAL SPECIFICATION

No.	Component	Material Specification
001	HANDWHEEL	CARBON STEEL
002	WHEELNUT	CARBON STEEL
003	NAMEPLATE	ALLUMINIUM
004	YOKE NUT	ASTM A582 TYPE 416
005	GLAND NUT	ASTM A194 2H
006	GRAND FLANGE	ASTM A105
007	GLAND STUD	AISI 410
008	GLAND	ASTM A276 TYPE 410
009		
010	PACKING	GRAPHITE
011		
012	BOLTS	ASTM A193 B7
013	BONNET	ASTM A105
014	GASKET	316+GRAPHITE SPIRAL WOUND
015	STEM	ASTM A276 TYPE 410
016	SEAT	ASTM A276 TYPE 410 + STELLITE GR.6
017	DISC	ASTM A276 TYPE 410
018	BODY	ASTM A105
019		
020		

DIMENSION AND WEIGHT

REDUCED BORE		A	B	C	Weight Kg.
Dn	Fig.n°	End to end	Centre to open	Bore Diam.	
-					
15	D8	80	150	9	1.7
20		90	165	13	2.3
25		110	180	18	3.6
32		127	215	23	5.5
40		155	250	30	7.5
50		170	260	35	11.6
-					